


# AMERICAN FIREGLASS

## FIRE PIT S.I.T. SYSTEMS (Smart Ignition Technology)

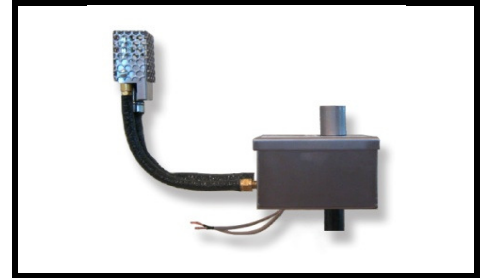

### SPECIFICATIONS

	Standard Capacity	High Capacity
<b>Natural Gas Part #</b>	AFG-SITS-N-SC	AFG-SITS-N-HC
<b>Propane Part #</b>	AFG-SITS-P-SC	AFG-SITS-P-HC
<b>Flame Sensor</b>	Thermopile	Thermopile
<b>Ignition Type</b>	Hot Surface Ignition	Hot Surface Ignition
<b>Ignition Sequence</b>	Intermittent Pilot	Intermittent Pilot
<b>Ignition Source</b>	Pilot	Pilot
<b>Max. BTU Output</b>	290k BTU/hr	512 BTU/hr
<b>Inlet/Outlet Size</b>	1/2" FPT	3/4" FPT
<b>Operating Voltage</b>	24 volts AC	24 volts AC
<b>Max. Inlet Pressure</b>	2.0 psi	2.0 psi
<b>Valve Enclosure Size</b>	4 3/8" x 4 3/8" x 4 3/8"	4 1/2" x 4 1/2" x 5"

All systems include the following hardware/fittings:

S.I.T System, 24v Transformer, Safety Shut-Off Valve, Key Valve, 16" & 28" Stainless Steel Gas Flex Lines

Specifications subject to change without notice.

We recommend that our products be installed and serviced by professionals who are certified in the U.S. by the National Fireplace Institute (NFI) as NFI Specialists or who are certified in Canada by Wood Energy Technical Training (WETT). Installation must conform with local codes or, in the absence of local codes, with the National Fuel Gas code, ANSI Z223.1/ Latest Edition

**American Fireglass, Inc.**

570 Third Street, Lake Elsinore, CA 92530

Phone (888) 264-1017 Fax (888) 679-3149 [www.AmericanFireglass.com](http://www.AmericanFireglass.com)